


Approved By

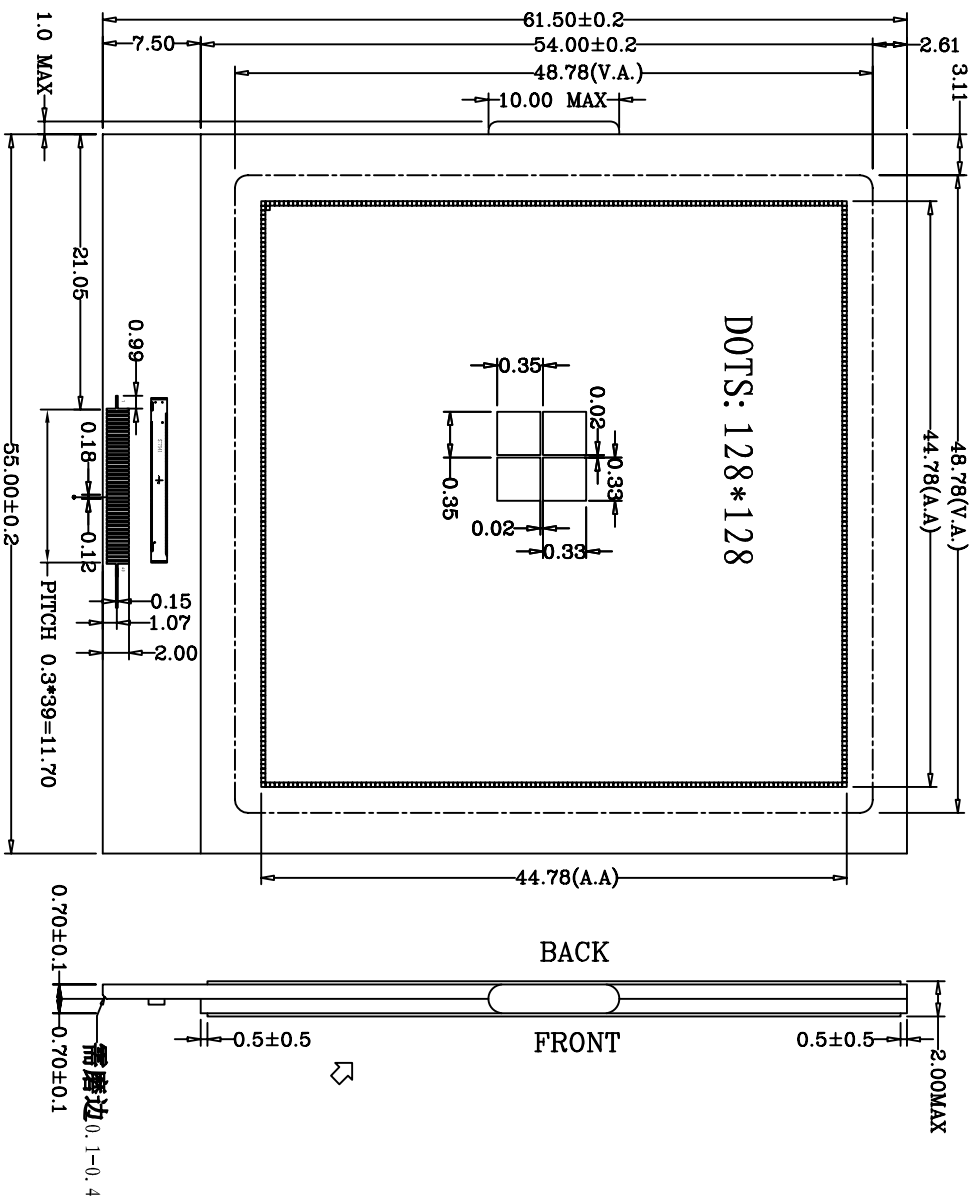

PIN	NAME	PIN	NAME	PIN	NAME
1	V0	16	VSS	31	D3
2	V1	17	VSS	32	D2
3	V2	18	VSS	33	D1
4	V3	19	VSS	34	D0
5	V4	20	VSS	35	E_RD
6	VR	21	VSS	36	RW_WR
7	OSC1	22	VDD	37	A0
8	INTRS	23	VDD	38	RST
9	VEXT	24	VDD	39	CSB
10	REF	25	VDD	40	PS1
11	VOUT_IN	26	VDD		
12	VOUT_IN	27	D7		
13	VOUT_OUT	28	D6		
14	VOUT_OUT	29	D5		
15	VSS	30	D4		

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6 O'CLOCK
3. DRIVE METHOD: 1/128DUTY, 1/12BIAS.
4. OPERATING VOLTAGE: 12.9V
5. POLARIZER MODE: TRANSPARENT/POSITIVE.
6. OPERATING TEMP: -10°C ~ +60°C.
7. STORAGE TEMP: -20°C ~ +70°C.
8. CONNECTOR: COG/FPC ST7541

Golden View Display

TEL: 239-332-8868

FAX: 239-590-6066

MODEL NO GVLCM128128G -12108A	DRAWN BY: ZAP	SCALE: 1:1	UNIT: MM
CHECKED BY: CXY	PAGE: 1/1	DATE: 2006.07.10	