

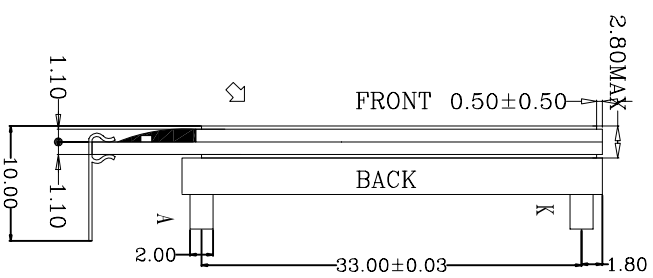


Ver	Date	Modify Contents

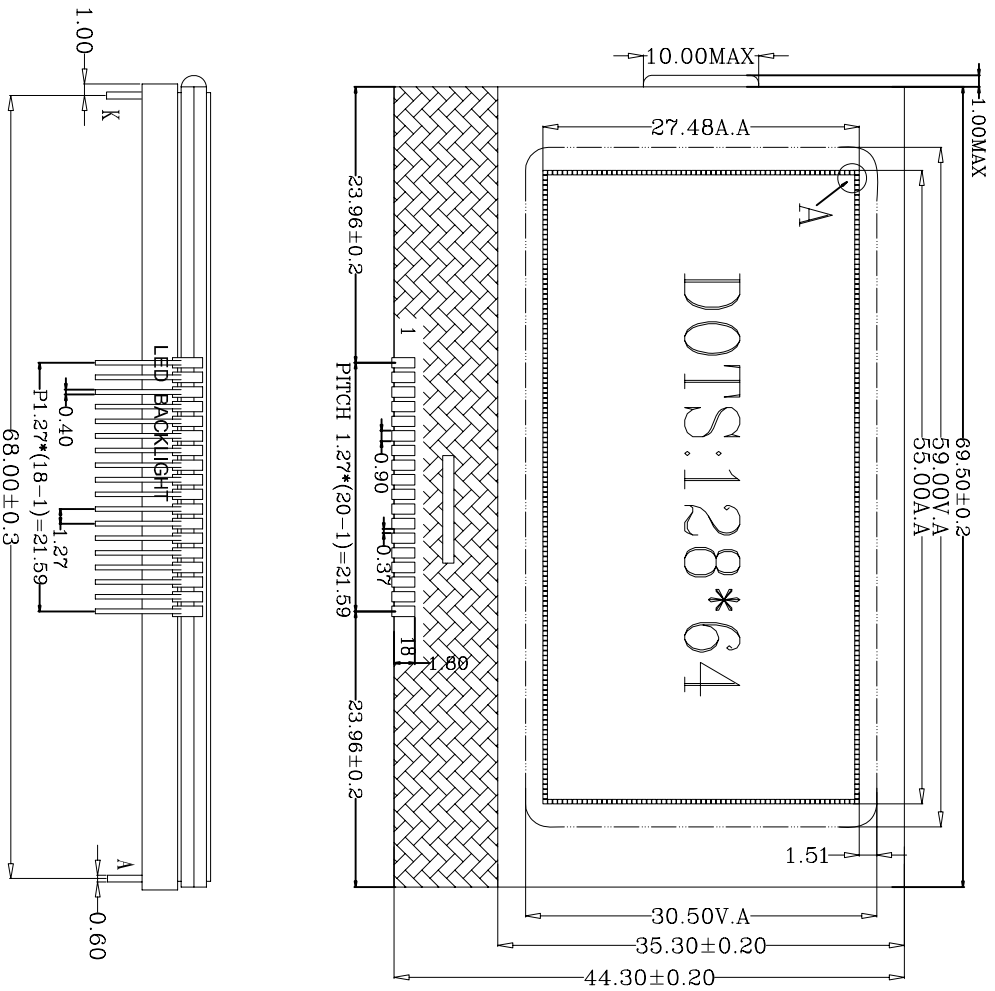

DETAIL A:(10:1)



PIN	SYMBOL
1	V0
2	V1
3	V2
4	V3
5	V4
6	C2-
7	C2+
8	C1+
9	C1-
10	C3+
11	Vout
12	VSS
13	VDD
14	S1
15	SCL
16	RS
17	/RES
18	/CS1

NOTES:

1. DISPLAY TYPE: STN BLUE
2. VIEWING DIRECTION: 6 O'CLOCK.
3. DRIVE METHOD: 1/65DUTY, 1/9BIAS.
4. OPERATING VOLTAGE: 9.0V.
5. POLARIZER MODE: TRANSPARENT/NEGATIVE
6. OPERATING TEMP: -20°C ~ +70°C.
7. STORAGE TEMP: -30°C ~ +80°C.
8. CONNECTOR: PIN COG(IC:ST7565P)
9. BACKLIGHT:LED(WHITE,LED*8,I=80MA,Vf=6.4V)
10. ALL WITHOUT TOLERANCE. X±0.3

Golden View Display

Tel: 239-332-8868 Fax:239-590-6066

PRODUCT NO. GVLCM12864G-13459B

DRAMN BY	LH	SCALE	1:1	REV.	A01
CHECKED BY	LZY	PAGE	1/1		
DATA	2008-08-18	UNIT	mm		

